
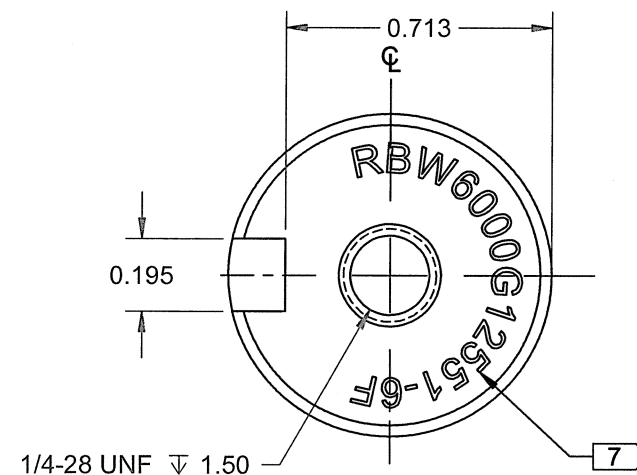


8 7 6 5 4 3 2 1


D

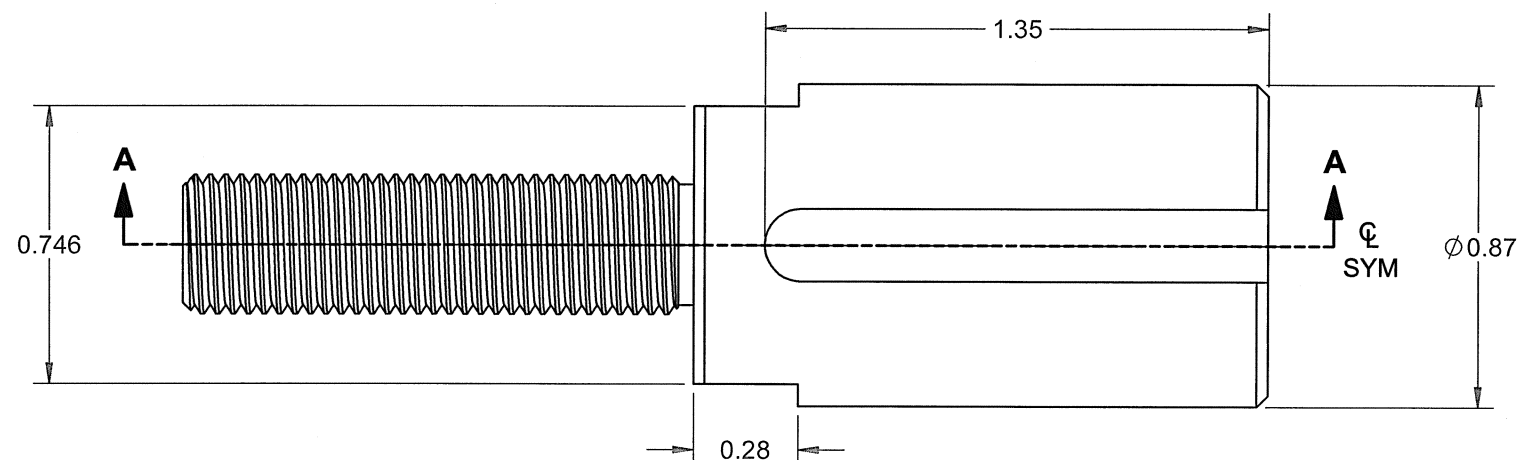


D

C

C

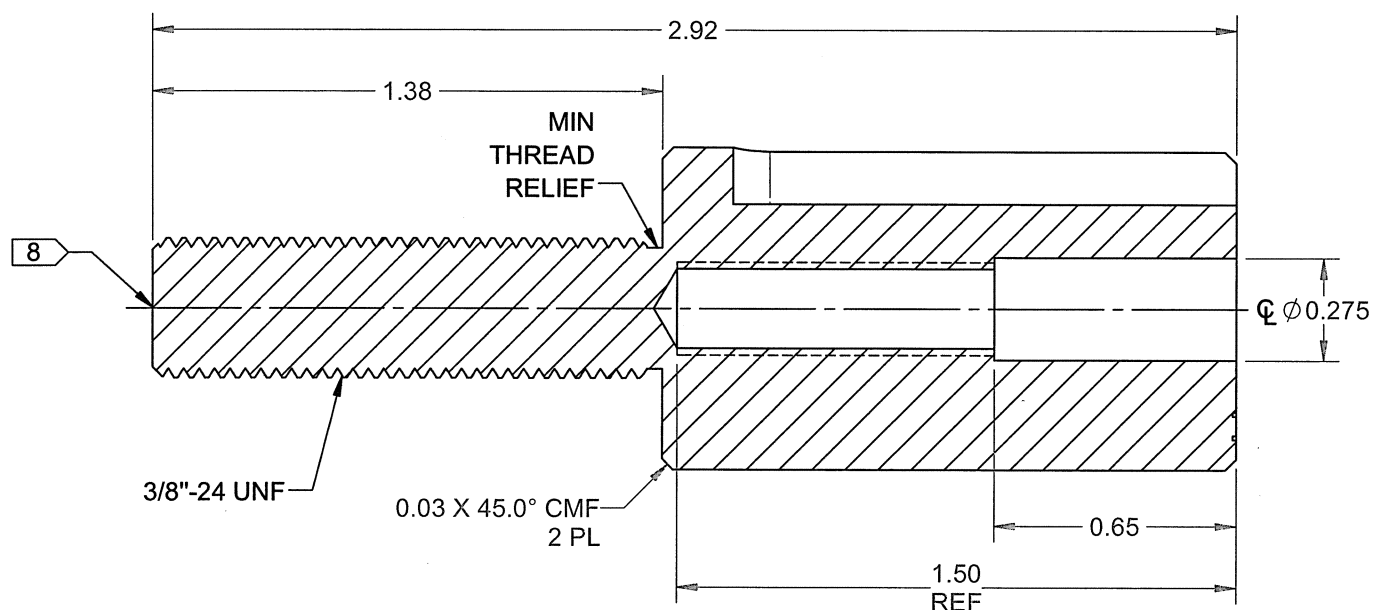

SECTION A-A

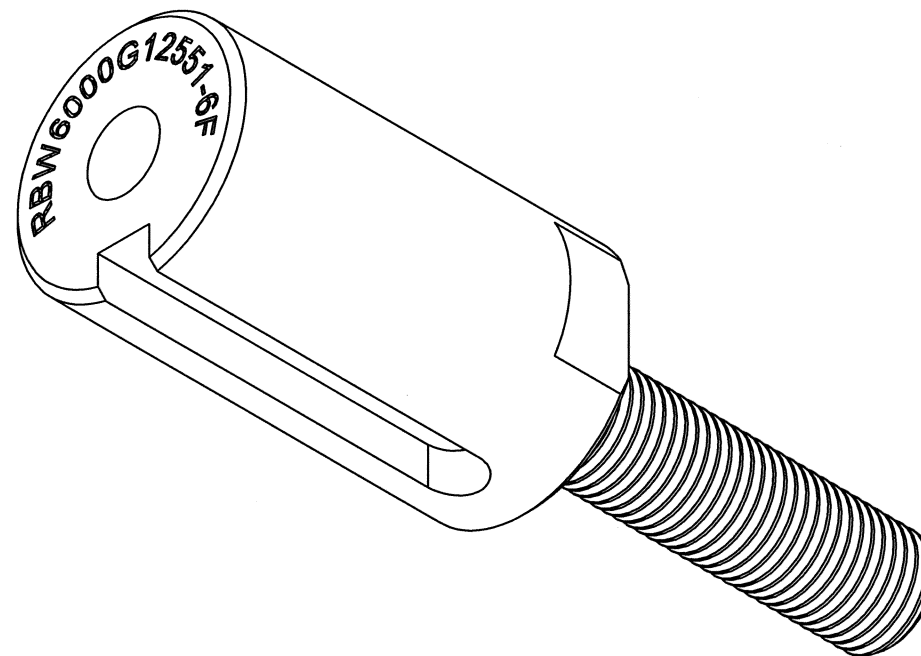

RBW6000G12551-6F AXIAL PUSHER

9

NOTES:

- 1) MATERIAL: 4140 (28-32 RC)
- 2) HEAT TREAT: N/A
- 3) FINISH: BLACK OXIDE PER MIL-C-13924 CLASS 1 THEN APPLY A THIN LAYER OF OIL / CPC PER MIL-PRF-16173 GRADE 3 CLASS 1 OR MIL-C-81309 TYPE III OR MIL-C-23411A OR MIL-PRF-81309 AND WIPE OFF EXCESS
- 4) TOLERANCES: X.X = +/- 0.1" / +/- 1°
X.XX = +/- 0.01" / +/- 0.5°
X.XXX = +/- 0.005" / +/- 0.1°
X.XXXX = +/- 0.0005" / +/- 0.05°
PARALLELISM, ECCENTRICITY AND SYMMETRY ABOUT ALL CENTER LINES = +/- 0.005"
- 5) UNITS: INCHES UNLESS OTHERWISE NOTED
- 6) REMOVE ALL SHARP EDGES AND BURRS
- 7) IDENTIFICATION: MACHINE ENGRAVE OR DOT MARK T/N, "RBW6000G12551-6F", AS SHOWN
- 8) CENTER DRILL IS ACCEPTABLE
- 9) THE TOOL ASSY MUST BE PACKAGED WITH A DESICCANT BAG INTO A TIGHT FITTING SEALED PLASTIC BAG

A

A

A	NEW ISSUE	19-837	VM
REV.	DESCRIPTION	ECN #	BY
DESIGN	VM	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	VM		
CHECKED	KPT	TOOL PART #	REV. A
MFG. APPR.	JFC	RBW6000G12551-6F	SHEET 1 OF 1
APPROVED	Wp	TITLE	SCALE
		AXIAL PUSHER	NTS
DATE	2019-08-06	COPYRIGHT © 2019 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	